

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IB2004/050905

A. CLASSIFICATION OF SUBJECT MATTER H01J61/28 H01J61/72		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) H01J		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 274 305 A (BOUCHARD ET AL) 28 December 1993 (1993-12-28) cited in the application	1-4
A	abstract column 1, lines 1-45 column 5, line 34 - column 6, line 27 figures 1-4	7,8
E	----- WO 2004/112085 A (KONINKLIJKE PHILIPS ELECTRONICS N.V.; DE MAN, ROLF, E; DEURENBERG, PETE) 23 December 2004 (2004-12-23) abstract claims 5-7,9-12 figures 1,2b ----- -/-	1,9-15
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "-" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family		
Date of the actual completion of the international search 30 January 2006		Date of mailing of the international search report 03/03/2006
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer Gijssbertsen, J

INTERNATIONAL SEARCH REPORT

Inter Application No
PCT/IB2004/050905

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 1 062 141 A (WESTINGHOUSE ELECTRIC CORPORATION) 15 March 1967 (1967-03-15) page 1, lines 12-22 page 2, lines 20-28, 70-75 page 3, lines 20-98 page 6, lines 43-111 figures 1, 2, 4, 7, 17-20 -----	1
A	GB 2 081 503 A (BADALEX LTD) 17 February 1982 (1982-02-17) abstract page 1, lines 15-21 page 2, lines 70-124 figures 1-3 -----	1, 5
A	WO 01/67479 A (SAES GETTERS S.P.A.; SANTELLA, GIANNI; TUISSI, AUSONIO) 13 September 2001 (2001-09-13) abstract page 1, lines 4-6 page 1, line 21 - page 2, line 9 page 5, lines 11-14 -----	1, 6
A	EP 0 918 352 A (TOSHIBA LIGHTING & TECHNOLOGY CORPORATION; TOSHIBA LIGHTING & TECHNOLO) 26 May 1999 (1999-05-26) abstract column 33, line 10 - column 34, line 45 figures 14, 15 -----	12-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB2004/050905

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5274305	A	28-12-1993	CA 2100449 A1 EP 0570570 A1 WO 9311557 A1	05-06-1993 24-11-1993 10-06-1993
WO 2004112085	A	23-12-2004	NONE	
GB 1062141	A	15-03-1967	BE 666597 A DE 1246120 B DE 1290257 B DE 1287215 B DE 1290631 B ES 335661 A2 GB 1175411 A GB 1137010 A GB 1137090 A NL 6507948 A NL 6700706 A NL 6700762 A NL 6700890 A SE 328054 B SE 328055 B SE 328056 B US 3422299 A US 3534212 A US 3619697 A	03-11-1965 03-08-1967 06-03-1969 16-01-1969 13-03-1969 16-02-1968 23-12-1969 18-12-1968 18-12-1968 10-01-1966 04-08-1967 04-08-1967 04-08-1967 07-09-1970 07-09-1970 07-09-1970 14-01-1969 13-10-1970 09-11-1971
GB 2081503	A	17-02-1982	NONE	
WO 0167479	A	13-09-2001	AU 8145501 A BR 0104954 A CN 1364304 A EP 1179216 A1 HU 0201276 A2 IT MI20000433 A1 JP 2003526881 T MX PA01011249 A TW 516071 B US 2002042239 A1	17-09-2001 19-02-2002 14-08-2002 13-02-2002 28-08-2002 06-09-2001 09-09-2003 14-07-2003 01-01-2003 11-04-2002
EP 0918352	A	26-05-1999	CN 1229521 A DE 69826416 D1 DE 69826416 T2 WO 9857354 A1 TW 432436 B US 6437502 B1	22-09-1999 28-10-2004 06-10-2005 17-12-1998 01-05-2001 20-08-2002



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

IB/2004/050905

HL030736

AL040505

REC'D 24 JUN 2004

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03101913.6 ✓

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 03101913.6 ✓
Demande no:

Anmeldetag:
Date of filing: 26.06.03 ✓
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Low-pressure mercury vapor discharge lamp with mercury releasing means

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H01J61/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

Low-pressure mercury vapor discharge lamp with mercury releasing means

The invention relates to a low-pressure mercury vapor discharge lamp.

The invention also relates to a compact fluorescent lamp.

In mercury vapor discharge lamps, mercury constitutes the primary component for the (efficient) generation of ultraviolet (UV) light. A luminescent layer comprising a luminescent material may be present on an inner wall of the discharge vessel to convert UV to other wavelengths, for example, to UV-B and UV-A for tanning purposes (sun panel lamps) or to visible radiation for general illumination purposes. Such discharge lamps are therefore also referred to as fluorescent lamps. Alternatively, the ultraviolet light generated may be used for manufacturing germicidal lamps (UV-C). The discharge vessel of low-pressure mercury vapor discharge lamps is usually circular and comprises both elongate and compact embodiments. Generally, the tubular discharge vessel of compact fluorescent lamps comprises a collection of relatively short straight parts having a relatively small diameter, which straight parts are connected together by means of bridge parts or via bent parts. Compact fluorescent lamps are usually provided with an (integrated) lamp cap. Normally, the means for maintaining a discharge in the discharge space are electrodes arranged in the discharge space. In an alternative embodiment the low-pressure mercury vapor discharge lamp comprises a so-called electrodeless low-pressure mercury vapor discharge lamp.

In the description and claims of the current invention, the designation "nominal operation" is used to refer to operating conditions where the mercury-vapor pressure is such that the radiation output of the lamp is at least 80% of that when the light output is maximal, i.e. under operating conditions where the mercury-vapor pressure is optimal. In addition, in the description and claims, the "initial radiation output" is defined as the radiation output of the discharge lamp 1 second after switching on the discharge lamp, and the "run-up time" is defined as the time needed by the discharge lamp to reach a radiation output of 80% of that during optimum operation.

Low-pressure mercury-vapor discharge lamps are known comprising an amalgam. Such discharge lamps have a comparatively low mercury-vapor pressure at room temperature. As a result, amalgam-containing discharge lamps have the disadvantage that also the initial radiation output is comparatively low when a customary power supply is used

to operate said lamp. In addition, the run-up time is comparatively long because the mercury-vapor pressure increases only slowly after switching on the lamp. Apart from amalgam-containing discharge lamps, low-pressure mercury-vapor discharge lamps are known which comprise both a (main) amalgam and a so-called auxiliary amalgam. If the auxiliary amalgam comprises sufficient mercury, then the lamp has a relatively short run-up time. Immediately after the lamp has been switched on, i.e. during preheating the electrodes, the auxiliary amalgam is heated by the electrode so that it relatively rapidly dispenses a substantial part of the mercury that it contains. In this respect, it is desirable that, prior to being switched on, the lamp has been idle for a sufficiently long time to allow the auxiliary amalgam to take up sufficient mercury. If the lamp has been idle for a comparatively short period of time, the reduction of the run-up time is only small. In addition, in that case the initial radiation output is (even) lower than that of a lamp comprising only a main amalgam, which can be attributed to the fact that a comparatively low mercury-vapor pressure is adjusted in the discharge space by the auxiliary amalgam. An additional problem encountered with comparatively long lamps is that it takes comparatively much time for the mercury liberated by the auxiliary amalgam to spread throughout the discharge vessel, so that after switching on such lamps, they demonstrate a comparatively bright zone near the auxiliary amalgam and a comparatively dark zone at a greater distance from the auxiliary amalgam, which zones disappear after a few minutes.

In addition, low-pressure mercury-vapor discharge lamps are known which are not provided with an amalgam and contain only free mercury. These lamps, also referred to as mercury discharge lamps, have the advantage that the mercury-vapor pressure at room temperature and hence the initial radiation output are relatively high as compared to amalgam-containing discharge lamps and as compared to discharge lamps comprising a (main) amalgam and an auxiliary amalgam. In addition, the run-up time is comparatively short. After having been switched on, comparatively long lamps of this type also demonstrate a substantially constant brightness over substantially the whole length, which can be attributed to the fact that the vapor pressure (at room temperature) is sufficiently high at the time of switching on these lamps.

In US Patent 5 274 305 the mercury vapor pressure in a low-pressure mercury discharge lamp is thermostatically controlled. The known low-pressure mercury discharge lamp includes electrodes and a source of mercury vapor sealed in a lamp envelope. A heater

and a thermal switching device are in thermal contact with the source of mercury vapor. The heater is energized when the source of mercury vapor is below a predetermined temperature during operation of the lamp. Preferably, the heater is a resistance heater electrically connected in series with one of the lamp electrodes. The thermal switching device can be a
5 bimetal thermostatic switch. The source of mercury vapor in the known low-pressure mercury vapor discharge lamp is typically an amalgam selected to have an optimum mercury vapor pressure at the maximum operating temperature of the lamp. The heater and the thermal switching device can be located external to the lamp envelope or can be located within the lamp envelope. The known low-pressure mercury vapor discharge lamp provides a
10 relatively constant light output over a broad range of operating temperatures and different lamp orientations.

A relatively large amount of mercury is necessary for the known low-pressure mercury vapor discharge lamps in order to realize a sufficiently long lifetime. A drawback of the known discharge lamps is that they form a burden on the environment. This is in
15 particular the case if the discharge lamps are injudiciously processed after the end of the lifetime.

The invention has for its object to eliminate the above disadvantage wholly or
20 partly. According to the invention, a low-pressure mercury vapor discharge lamp of the kind mentioned in the opening paragraph for this purpose comprises:

a light-transmitting discharge vessel enclosing, in a gastight manner, a
discharge space provided with a filling of mercury and a rare gas,
the discharge vessel comprising discharge means for maintaining a discharge
25 in the discharge space,
the discharge vessel being provided with a source of mercury,
the discharge vessel being provided with a releasing means for the controlled
release of mercury vapor from the source of mercury,
the releasing means being operative in response to a condition of the low-
30 pressure mercury vapor discharge lamp,
the condition being a characteristic of the discharge lamp and/or a pre-determined time interval.

By providing a releasing means in the discharge vessel for the controlled release of mercury vapor from the source of mercury, the amount of mercury in the vapor

phase in the discharge vessel during operation of the discharge lamp can be controlled during life of the discharge lamp. In addition, by making the releasing means responsive to a condition of the discharge lamp enables the discharge lamp to operate under unsaturated conditions during life of the discharge lamp. By measuring characteristics of the discharge lamp, the conditions for releasing mercury from the source of mercury can be set and the releasing means controls the amount of mercury vapor present in the discharge vessel during operation of the discharge lamp.

According to the invention, the condition which determines the release of mercury from the source of mercury is set by a characteristic of the discharge lamp and/or a pre-determined time interval. Operating the releasing means in response to a pre-determined time interval enables to gradually make available mercury during life of the discharge lamp. During life mercury is consumed in the discharge vessel, for instance in the glass and/or in the phosphor layer. This consumption of mercury resulting in less mercury being available for the maintenance of a discharge in the discharge vessel can be compensated by releasing some mercury into the discharge vessel during life of the discharge lamp at pre-determined times.

Operating the releasing means in response to a characteristic of the discharge lamp is a more sophisticated or "intelligent" means to enable the controlled release of mercury vapor from the source of mercury. The releasing means for the controlled release of mercury vapor can operate in response of the conditions in the discharge lamp.

Preferably the condition of the low-pressure mercury vapor discharge lamp is indicative of a content of mercury vapor in the discharge vessel below a pre-determined level. In a low-pressure mercury vapor discharge lamp operating under unsaturated condition, the mercury content is, preferably, higher than 0.02 mg Hg.

Preferably, the lamp characteristic is the arc characteristic of the discharge in the discharge vessel. Other lamp characteristics indicative of a reduced mercury content are a decreased lumen output of the discharge lamp, an increased infrared contribution to the lamp spectrum of the discharge lamp, a change in the lamp voltage, changes in the dynamic behavior of the discharge lamp and the occurrence of striations in the discharge lamp.

In the description and claims of the current invention, the designations "unsaturated" or "unsaturated mercury conditions" are used to refer to a low-pressure mercury vapor discharge lamp in which the amount of mercury dosed into the discharge vessel (during manufacturing) of the low-pressure mercury vapor discharge lamp is equal to

or lower than the amount of mercury needed for a saturated mercury vapor pressure at nominal operation of the discharge lamp.

Operating a mercury vapor discharge lamp under unsaturated mercury conditions has a number of advantages. Generally speaking, the performance of unsaturated mercury discharge lamps (light output, efficacy, power consumption, etc.) is independent of the ambient temperature as long as the mercury pressure is unsaturated. This results in a constant light output which is independent on the way of burning the discharge lamp (base up versus base down, horizontally versus vertically). In practice, a higher light output of the unsaturated mercury vapor discharge lamp is obtained in the application. Unsaturated lamps combine a higher light output and an improved efficacy in applications at elevated temperatures with minimum mercury content. This results in ease of installation and in freedom of design for lighting and luminaire designers. An unsaturated mercury discharge lamp gives a relatively high system efficacy in combination with a relatively low Hg content. In addition, unsaturated lamps have an improved maintenance. Because the trends towards further miniaturization and towards more light output from one luminaire will continue the forthcoming years, it may be anticipated that problems with temperature in application will more frequently occur in the future. With an unsaturated mercury vapor discharge lamp these problems are largely reduced. Unsaturated lamps combine minimum mercury content with an improved lumen per Watt performance at elevated temperatures.

When the performance of unsaturated lamps is compared to so-called cold-spot or to so-called amalgam low-pressure mercury vapor discharge lamps the following advantages can be mentioned. In a "cold-spot" mercury discharge lamp, the mercury pressure is controlled by a so-called cold-spot temperature somewhere in the discharge vessel. In an amalgam mercury discharge lamp, the mercury pressure is controlled by means of an amalgam; in a number of such amalgam discharge lamps additionally an auxiliary amalgam is employed. The initial radiation output and the run-up time and ignition voltage of an unsaturated mercury discharge lamp are comparable to cold-spot lamps. Other properties like size (no cold-spot area necessary in an unsaturated discharge lamp; e.g. by introducing long stems), life time, color temperature, color rendering index and reliability are at the same level as known mercury discharge lamps. The maintenance of unsaturated lamps is expected to be better than that of the known compact fluorescent lamps (CFL) and fluorescent discharge lamps (TL). With unsaturated lamps miniaturization can be driven to its limits because thermal problems are minimized. For new installation unsaturated mercury discharge lamps this can result in a reduction of the total costs of ownership.

It is not an easy task to operate a low-pressure mercury vapor discharge lamp under unsaturated mercury conditions while simultaneously realizing a relatively long life of the discharge lamp. It is known that measures are taken in low-pressure mercury vapor discharge lamps to reduce the amount of mercury that during life of the discharge lamp is no longer able to contribute to the reactive atmosphere in the discharge space in the discharge vessel. Mercury is lost in that, due to the interaction of mercury and materials present in the lamp (such as glass, coatings, electrodes) and parts of the inner wall of the discharge vessel are blackened. Wall blackening does not only give rise to a lower light output but also gives the lamp an unaesthetic appearance, particularly because the blackening occurs irregularly, for example, in the form of dark stains or dots. Known measures to reduce the amount of mercury lost during life of the discharge lamp encompass special compositions of the glass of the discharge vessel, the application of protective coatings on the wall of the lamp vessel and electrode shields.

The measure according to the invention enables the manufacturing of long-life low-pressure mercury vapor discharge lamps which operate under conditions of unsaturated mercury content. Such unsaturated mercury discharge lamps have the advantage that the burden on the environment is reduced.

Several embodiments of the releasing means and sources of mercury can be realized. According to a preferred embodiment of the invention, a low-pressure mercury vapor discharge lamp of the kind mentioned in the opening paragraph is for this purpose characterized in that the releasing means is operated via a switch device. The switch device releases some mercury into the lamp vessel from the source of mercury. The switch device responds to a condition of the low-pressure mercury vapor discharge lamp indicative of a too low mercury vapor content in the discharge vessel.

Preferably, the switch device is mounted in the discharge vessel. In an alternative embodiment the switch device is mounted external to the discharge vessel.

According to a preferred embodiment of the invention, a low-pressure mercury vapor discharge lamp of the kind mentioned in the opening paragraph is for this purpose characterized in that the switch device comprises a reed relay. A reed relay is a well-known switch device in which current flowing in one circuit switches on and off a current in a second circuit. According to an alternative, preferred embodiment of the invention, a low-pressure mercury vapor discharge lamp of the kind mentioned in the opening paragraph is for this purpose characterized in that the releasing means is operated via an arc discharge. By

way of example a controlled dc discharge, e.g. by means of a capacitor drained by the discharge, is created between the discharge electrode and the source of mercury.

Preferably, the source of mercury comprises at least one dispenser fiber comprising a mercury dispenser material. The releasing means may initiate a partial vaporization of the dispenser fibers while releasing mercury.

The mercury content in the discharge vessel can be expressed as the pressure of mercury in the discharge vessel of the low-pressure mercury vapor discharge lamp. According to a preferred embodiment of the invention, a low-pressure mercury vapor discharge lamp of the kind mentioned in the opening paragraph is for this purpose characterized in that the product of the mercury pressure p_{Hg} and the internal diameter D_{in} of the discharge vessel is in the range $0.13 \leq p_{Hg} \times D_{in} \leq 8 \text{ Pa.cm}$. A discharge vessel of a low-pressure mercury vapor discharge lamp according to this preferred embodiment of the invention in which the product of the mercury pressure (expressed in Pa) and the internal diameter (expressed in mm) of the discharge vessel which is in the mentioned range from, contains a relatively low amount of mercury. The mercury content is considerably lower than what is normally provided for in known low-pressure mercury vapor discharge lamps. The low-pressure mercury vapor discharge lamp according to the second measure of the invention operates as a so-called "unsaturated" mercury vapor discharge lamp.

Preferably, the product of the mercury pressure p_{Hg} and the internal diameter D_{in} of the discharge vessel is in the range $0.13 \leq p_{Hg} \times D_{in} \leq 4 \text{ Pa.cm}$. In this preferred regime of $p_{Hg} \times D_{in}$ the mercury content in the discharge lamp is further reduced. In this preferred embodiment of the invention, the low-pressure mercury vapor discharge lamp according to the invention operates as an unsaturated mercury vapor discharge lamp.

A preferred embodiment of the low-pressure mercury vapor discharge lamp according to the invention is characterized in that the discharge vessel contains less than approximately 0.1 mg mercury. There is a tendency in governmental regulations to prescribe a maximum amount of mercury present in a low-pressure mercury vapor discharge lamp that if the discharge lamp comprises less than said prescribed amount allows the user to dispose of the lamp without environmental restrictions. If a mercury discharge lamp contains less than 0.2 mg of mercury such requirements are largely fulfilled. Preferably, the discharge vessel contains less than or equal to approximately 0.05 mg mercury.

These and other aspects of the invention are apparent from and will be elucidated with reference to the embodiments described hereinafter.

In the drawings:

Fig. 1A is a cross-sectional view of an embodiment of the low-pressure mercury-vapor discharge lamp in accordance with the invention in longitudinal section;

Fig. 1B shows a first embodiment of the low-pressure mercury vapor discharge lamp according to the invention;

Fig. 1C shows a second embodiment of the low-pressure mercury vapor discharge lamp according to the invention;

Fig. 1D shows a third embodiment of the low-pressure mercury vapor discharge lamp according to the invention;

Fig. 2A is a cross-sectional view of a further alternative embodiment of a low-pressure mercury vapor discharge lamp according to the invention, and

Fig. 2B shows a detail of Figure 2A including a switching scheme.

The Figures are purely diagrammatic and not drawn to scale. Notably, some dimensions are shown in a strongly exaggerated form for the sake of clarity. Similar components in the Figures are denoted as much as possible by the same reference numerals.

Figure 1A very schematically shows a low-pressure mercury-vapor discharge lamp comprising a glass discharge vessel having a tubular portion 11 about a longitudinal axis 2, which discharge vessel transmits radiation generated in the discharge vessel 10 and is provided with a first and a second end portion 12a; 12b, respectively. In this example, the tubular portion 11 has a length L_{dv} of 120 cm and an inside diameter D_{in} of 24 mm. The discharge vessel 10 encloses, in a gastight manner, a discharge space 13 containing a filling of mercury and an inert gas mixture comprising for example argon. In the example of Figure 1A, the side of the tubular portion 11 facing the discharge space 13 is provided with a protective layer 17. In an alternative embodiment the first and second end portions 12a; 12b are also coated with a protective layer. In fluorescent discharge lamps, the side of the tubular portion 11 facing the discharge space 13 is, in addition, coated with a luminescent layer 16 including a luminescent material (for example a fluorescent powder) which converts the ultraviolet (UV) light generated by fallback of the excited mercury into (generally) visible light. In an alternative embodiment the luminescent layer 16 is, in addition, provided with a further protective layer (not shown in Figure 1A).

In the example of Figure 1A means for maintaining a discharge in the discharge space 13 are electrodes 20a; 20b arranged in the discharge space 13, said electrodes 20a; 20b being supported by the end-ports 12a; 12b. The electrode 20a; 20b is a winding of tungsten covered with an electron-emitting substance, in this case a mixture of barium oxide, calcium oxide and strontium oxide. Current-supply conductors 30a, 30a'; 30b, 30b' of the electrodes 20a; 20b, respectively, pass through the end ports 12a; 12b and issue from the discharge vessel 10 to the exterior. The current-supply conductors 30a, 30a'; 30b, 30b' are connected to contact pins 31a, 31a'; 31b, 31b' secured to a lamp cap 32a, 32b. In general, around each electrode 20a; 20b an electrode ring is arranged (not shown in Figure 1A) on which a glass capsule for proportioning mercury is clamped.

In the example shown in Figure 1A, the electrode 20a; 20b is surrounded by an electrode shield 22a; 22b which, preferably, is made from a ceramic material. Preferably, the electrode shield is made from a ceramic material comprising aluminum oxide. Particularly suitable electrode shields are manufactured from so-called densely sintered Al_2O_3 , also referred to as DGA. Preferably, the temperature of the electrode shield 22a; 22b is 450°C during nominal operation. In an alternative embodiment, the electrode shield 22a; 22b is made from stainless steel. At said high temperatures, such an electrode shield is dimensionally stable, corrosion resistant and exhibits a relatively low heat emissivity.

Figure 1A very schematically shows that the discharge vessel 10 is provided with a source of mercury 7. In the example of Figure 1A, the source of mercury 7 is attached to one of the current-supply conductors 30a'. In addition, the discharge vessel 10 is provided with a releasing means 8 for the controlled release of mercury vapor from the source of mercury 7 (Figure 1A shows schematically a connection between the source of mercury and the releasing means; see Figure 1B and 1C for more detail). The releasing means 8 is operative in response to a condition of the low-pressure mercury vapor discharge lamp, the condition being a characteristic of the discharge lamp and/or a pre-determined time interval.

Figure 1B very schematically shows a first embodiment of the low-pressure mercury vapor discharge lamp according to the invention. The end portion 12a supports the electrode 20a via the current supply conductors 30a, 30a'. In the embodiment shown in Figure 1B the discharge vessel 10 is provided with a source of mercury 7. In addition, the source of mercury 7 is supported by one of the current-supply conductors 30a'. The source of mercury 7 can for instance be a rod of Ti_3Hg from which Hg can be released irreversibly. In addition, the discharge vessel 10 is provided with a releasing means 8 for the controlled release of mercury vapor from the source of mercury 7. In the embodiment of Figure 1B the

releasing means 8 comprises an encapsulated reed relay 19 activated by a dc component added to the normal lamp current. When the reed relay 19 when a current is fed through line 19', the source of mercury 7 is heated via the heating wire 7' surrounding the source of mercury 7 and releases mercury which becomes available to the discharge in the discharge space 13. The releasing means 8 is operative in response to a condition of the low-pressure mercury vapor discharge lamp, the condition being a characteristic of the discharge lamp and/or a pre-determined time interval. By way of example the characteristic of the discharge lamp can be the arc characteristic in the discharge space 13 which can be determined by measuring the voltage over and the current through the discharge lamp. The lamp current in relation to the lamp voltage are indicative of the arc characteristic of the discharge lamp.

Other lamp characteristics indicative of a reduced mercury content in the discharge vessel are a decreased lumen output of the discharge lamp (which can be measured via a output sensor), an increased infrared contribution to the lamp spectrum of the discharge lamp, a change in the lamp voltage, changes in the dynamic behavior of the discharge lamp and the occurrence of striations in the discharge lamp.

Figure 1C very schematically shows a second embodiment of the low-pressure mercury vapor discharge lamp according to the invention. The source of mercury 7 is supported by one of the current-supply conductors 30a. The releasing means 8 controls the release of mercury vapor from the source of mercury 7. In the embodiment of Figure 1C the releasing means 8 comprises an encapsulated reed relay 19 activated by a dc component added to the normal lamp current. When the reed relay 19 when a current is fed through line 19', the source of mercury 7 is heated via the heating wire 7' surrounding the source of mercury 7 and releases mercury which becomes available to the discharge in the discharge space 13.

Figure 1D very schematically shows a third embodiment of the low-pressure mercury vapor discharge lamp according to the invention. The source of mercury 7 is supported by one of the current-supply conductors 30a. An additional current-supply conductor 30a" is provided in the end portion 12a of the discharge vessel 10. This additional current-supply conductor 30a" provides an electrical connection to a releasing means outside the discharge vessel (not shown in Figure 1D; see by way of example the embodiments shown in Figure 2A and 2B) The releasing means controls the release of mercury vapor from the source of mercury 7 (e.g. by energizing the heating wire 7').

Figure 2A very schematically shows a cross-sectional view of an further alternative embodiment of a low-pressure mercury vapor discharge lamp according to the

invention. In the example of Figure 2A the discharge vessel 10 comprises electrodes 20a (only one electrode is shown in Figure 2A) arranged in the discharge space 13, said electrode 20a being supported by the end portion 12a. Current-supply conductors 30a, 30a' of the electrodes 20a pass through the end portions 12a and issue from the discharge vessel 10 to the exterior.

In the embodiment shown in Figure 2A an additional ferrule 16a is placed in the exhaust tube 15a. Connected to the ferrule 16a are some (isolated) dispenser fibers 17a, 17a' of a mercury dispenser material. When the mercury vapor content in the discharge vessel 10 becomes below a pre-determined level, a controlled (dc) discharge is created between the the electrode 20a carried by the current-supply conductor 30a; 30a' and (one of) these dispenser fibers 17a; 17a'. In the example of Figure 2A, the ferrule 16a serves as cathode whereas the electrode 20a serves as anode. One way to create a controlled discharge is by means of a dc charged parallel capacitor C2, which is drained by the dc discharge. Eventually the hot cathode spot of the dc discharge will heat up only one of the dispenser fibers 17a and upon vaporizing this dispenser fiber 17a mercury is released. The dispenser fiber 17a will be partially evaporated because of lack of energy in the parallel capacitor C2 or will evaporate completely when there is enough energy in the capacitor C2. In the latter case, the cathode hot spot will eventually touch the ferrule 16a and the hot spot remains there until there is not enough energy left in the capacitor C2. The next time, another dispenser fiber 17a' takes its turn until no dispenser fibers are available.

In an alternative embodiment of the melting process one of the vaporized metals serves as a (hydrogen/oxygen) getter.

Figure 2B very schematically shows a detail of Figure 2A including a switching scheme. In the embodiment of the invention shown in Figure 2B, a primary winding L1 of a (small) hf transformer T together with a series capacitor C0 form a series resonance circuit. When the electrode heating frequency equals the resonance frequency, the capacitor C1 will be charged until the breakdown voltage of a Diac (20-40V) is reached. During that time the high voltage capacitor C2 is charged by means of a secondary winding L2 of the transformer T. As a next step, the thyristor Th is fired and by means of the charged high voltage capacitor C2, the ferrule 16a is put on a high negative potential with respect to the electrode 20a. If this voltage is high enough (typically above approximately 400V), a single (vapor arc like) discharge will occur between one of the dispenser fibers 17a; 17a' and the electrode 20a. Depending on the energy in the capacitor C2, one of the dispenser fibers 17a; 17a' wire will be partially or totally evaporated. After that it takes a while to recharge

the high voltage capacitor C2 if the operating frequency of the main discharge electrode heating has not been changed. Subsequently, the arcing and melting/evaporating process will start all over again until all dispenser fibers 17a; 17a' are evaporated. To prevent this, the operating frequency is tuned out of resonance on time. Hence, by changing the operating
5 frequency of the heating of the electrode 20a (e.g. by an "intelligent" hf ballast) (additional mercury can be dosed at predetermined time intervals and/or in a controlled way during life of the low-pressure mercury vapor discharge lamp. In Figure 2B a number of diodes D1, D2, D3 and a resistance R2 has been provided. An alternative for a Diac is a Sidac.

10 In order to create the desired discharge an additional feed-through is created in the end portion 12a of the discharge vessel. An advantage of the switching scheme creating a vapor arc like discharge as shown in Figure 2B is that the switching scheme can be build into the lamp cap. In this manner, the low-pressure mercury vapor discharge lamp according to the invention comprises two contact pins 31a, 31a'; 31b, 31b' secured to lamp caps 32a, 32b at either side of the discharge vessel 10.

15 It should be noted that the above-mentioned embodiments illustrate rather than limit the invention, and that those skilled in the art will be able to design many alternative embodiments without departing from the scope of the appended claims. In the claims, any reference signs placed between parentheses shall not be construed as limiting the claim. Use of the verb "comprise" and its conjugations does not exclude the presence of elements or
20 steps other than those stated in a claim. The article "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. The invention may be implemented by means of hardware comprising several distinct elements, and by means of a suitably programmed computer. In the device claim enumerating several means, several of these means may be embodied by one and the same item of hardware. The mere fact that certain
25 measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage.

CLAIMS:

1. A low-pressure mercury vapor discharge lamp comprising:
a light-transmitting discharge vessel (10) enclosing, in a gastight manner, a discharge space (13) provided with a filling of mercury and a rare gas,
the discharge vessel (10) comprising discharge means for maintaining a
5 discharge in the discharge space (13),
the discharge vessel (10) being provided with a source of mercury (7),
the discharge vessel (10) being provided with a releasing means (8) for the controlled release of mercury vapor from the source of mercury (7),
the releasing means (8) being operative in response to a condition of the low-
10 pressure mercury vapor discharge lamp,
the condition being a characteristic of the discharge lamp and/or a pre-determined time interval.
2. A low-pressure mercury vapor discharge lamp as claimed in claim 1,
15 characterized in that the releasing means (8) is operated via a switch device (9).
3. A low-pressure mercury vapor discharge lamp as claimed in claim 2,
characterized in that the switch device (9) is mounted in the discharge vessel (10).
- 20 4. A low-pressure mercury vapor discharge lamp as claimed in claim 2,
characterized in that the switch device (9) comprises a reed relay (19).
5. A low-pressure mercury vapor discharge lamp as claimed in claim 1,
characterized in that the releasing means (8) is operated via an arc discharge.
25
6. A low-pressure mercury vapor discharge lamp as claimed in claim 1, 2 or 5,
characterized in that the source of mercury (7) comprises at least one dispenser fiber (17a;
17a') comprising a mercury dispenser material.

7. A low-pressure mercury vapor discharge lamp as claimed in claim 1, 2 or 5, characterized in that the condition of the low-pressure mercury vapor discharge lamp is indicative of a content of mercury vapor in the discharge vessel (10) below a pre-determined level.

5

8. A low-pressure mercury vapor discharge lamp as claimed in claim 1, 2 or 5, characterized in that the lamp characteristics is the arc characteristic of the discharge in the discharge vessel (10), a decreased lumen output of the discharge lamp, an increased infrared contribution to the lamp spectrum of the discharge lamp, a change in the lamp voltage, changes in the dynamic behavior of the discharge lamp and/or the occurrence of striations in the discharge lamp.

9. A low-pressure mercury vapor discharge lamp as claimed in claim 1, 2 or 5, characterized in that the product of the mercury pressure p_{Hg} and the internal diameter D_{in} of the discharge vessel (10) is in the range $0.13 \leq p_{Hg} \times D_{in} \leq 8$ Pa.cm.

10. A low-pressure mercury vapor discharge lamp as claimed in claim 9, characterized in that the product of the mercury pressure p_{Hg} and the internal diameter D_{in} of the discharge vessel (10) is in the range $0.13 \leq p_{Hg} \times D_{in} \leq 4$ Pa.cm.

20

11. A low-pressure mercury vapor discharge lamp as claimed in claim 1, 2, or 5, characterized in that the discharge vessel (10) contains less than 0.1 mg mercury.

12. A compact fluorescent lamp comprising a low-pressure mercury-vapor discharge lamp as claimed in claim 1, 2, or 5, characterized in that a lamp housing is attached to the discharge vessel of the low-pressure mercury-vapor discharge lamp, which lamp housing is provided with a lamp cap.

25

ABSTRACT:

Low-pressure mercury vapor discharge lamp has a light-transmitting discharge vessel (10) enclosing, in a gastight manner, a discharge space (13) provided with a filling of mercury and a rare gas. The discharge vessel (10) comprises discharge means for maintaining a discharge in the discharge space (13). The discharge vessel is provided with a source of mercury (?). In addition, the discharge vessel is provided with a releasing means (?) for the controlled release of mercury vapor from the source of mercury. The releasing means is operative in response to a condition of the low-pressure mercury vapor discharge lamp, the condition being a characteristic of the discharge lamp and/or a pre-determined time interval. The discharge lamp according to the invention operates under unsaturated mercury conditions. Preferably, the releasing means is operated via a switch device, preferably comprising a reed relay.

Fig. 1A

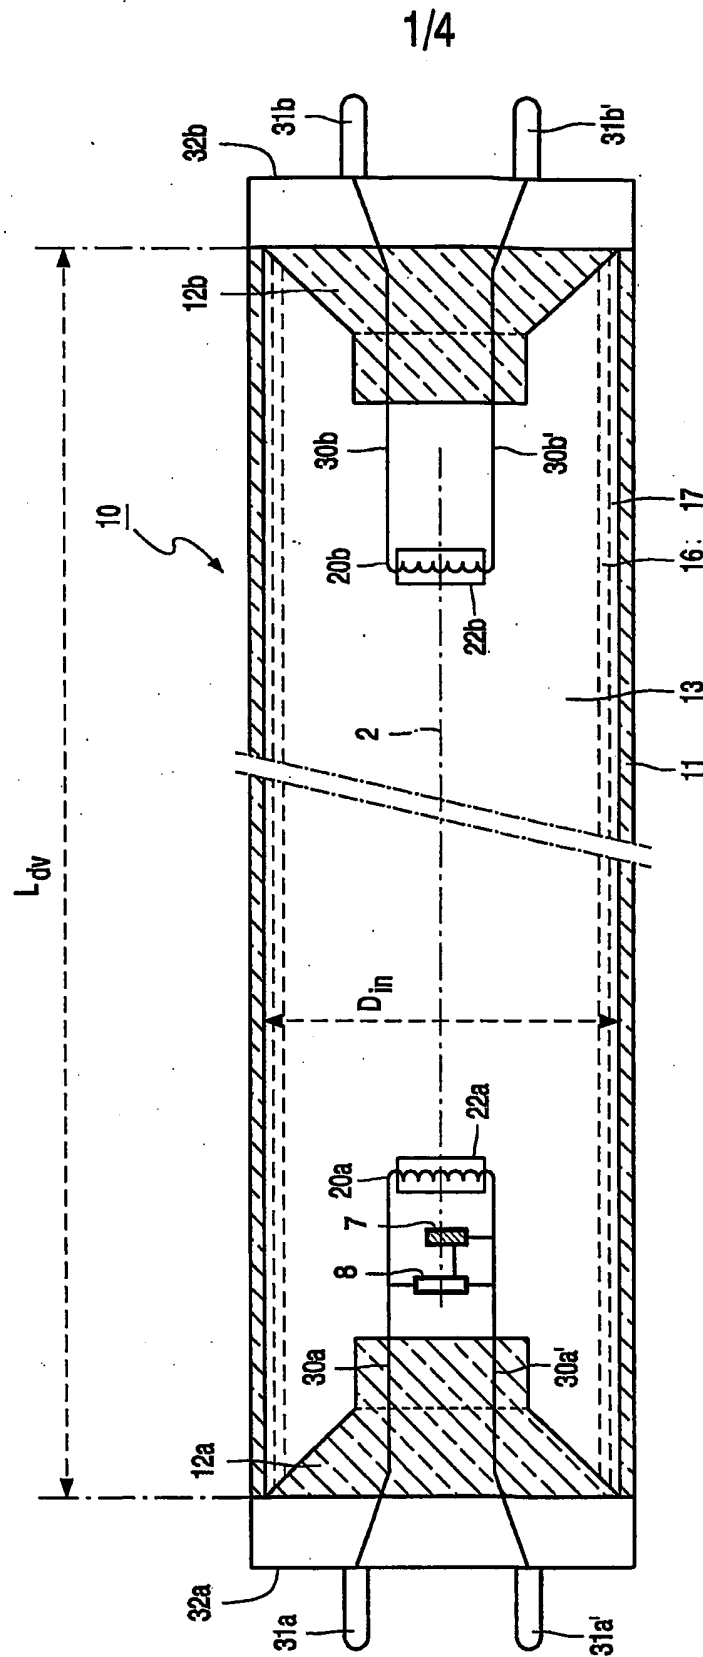


FIG. 1A

2/4

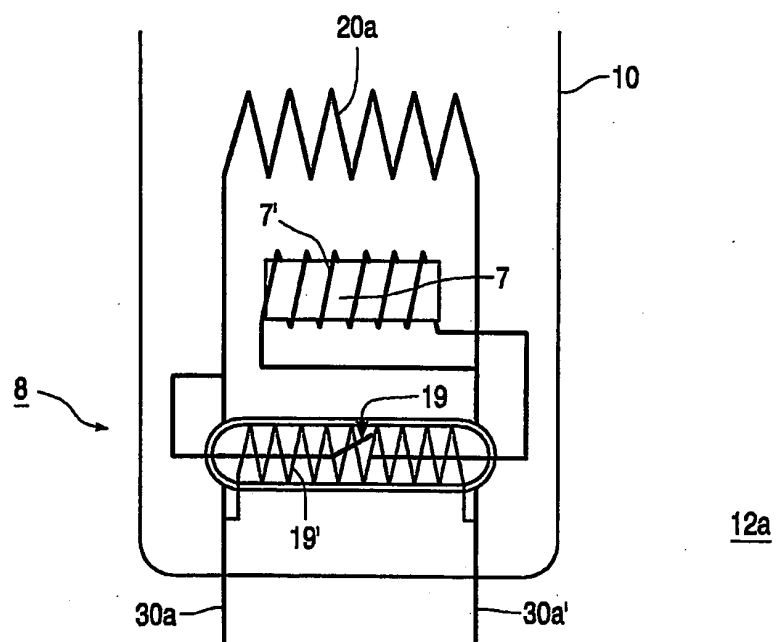


FIG. 1B

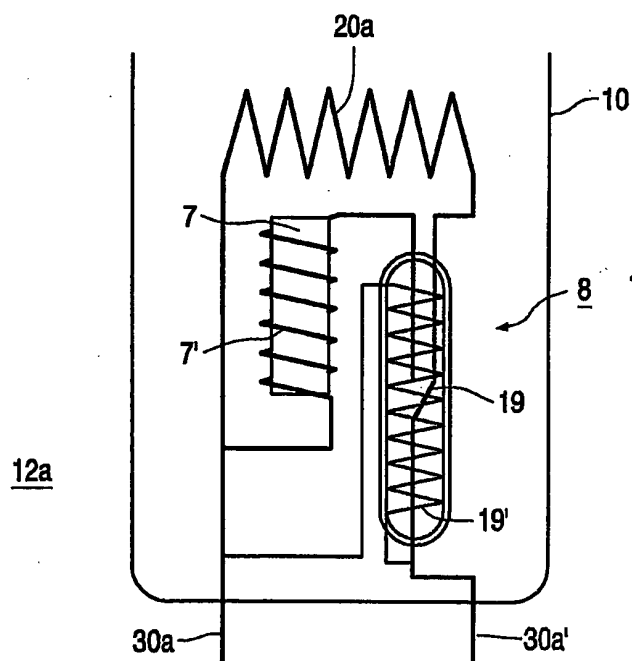


FIG. 1C

3/4

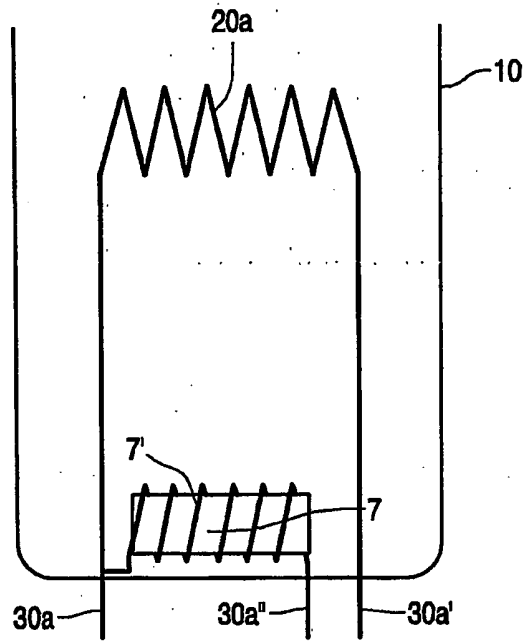


FIG. 1D

4/4

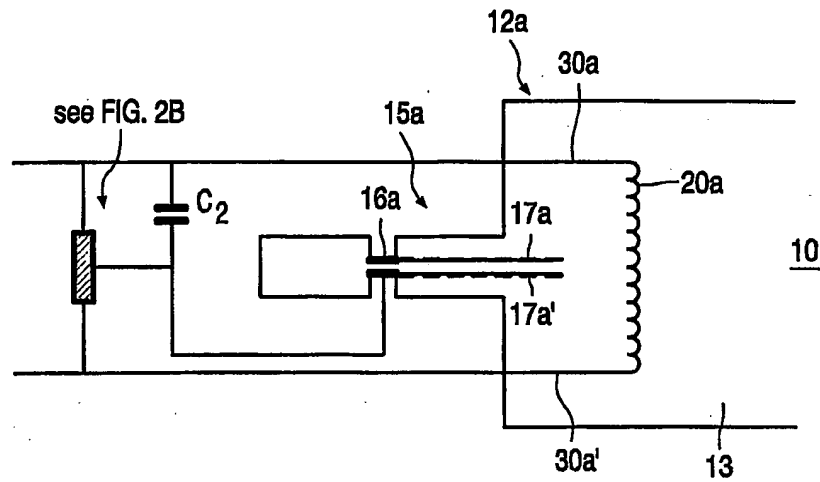


FIG. 2A

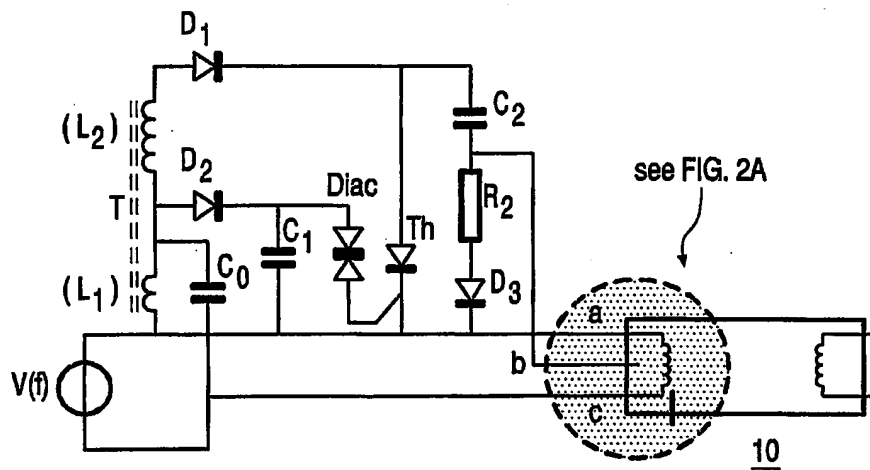


FIG. 2B

BEST AVAILABLE COPY